September 15, 2020

David Hochschild Mary Nichols Liane Randolph Chair Chair Commissioner

California Energy Commission California Air Resources Board California Public Utilities Commission

1516 Ninth Street, 1001 I Street 505 Van Ness Avenue Sacramento, CA 95814 Sacramento, CA 95814 San Francisco, CA 94102

Dear Chair Hochschild, Chair Nichols, and Commissioner Randolph,

The National Hydropower Association (NHA) appreciates the opportunity to comment on the S.B. 100 Modeling Framework and Scenarios. NHA's comments are focused on the importance of including small hydropower in future modeling scenarios and reports, especially the Joint Agency Report. We hope you will find our comments useful in your preparation of an action plan.

NHA is a non-profit national association dedicated to securing hydropower as a clean, carbon-free, renewable, and reliable energy resource that serves the Nation's environmental and energy objectives. Our membership consists of more than 240 organizations, including public and investor-owned utilities, independent power producers, equipment manufacturers, and professional organizations that provide legal, environmental, and engineering services to the hydropower industry. NHA members are excited about the opportunities for hydropower to contribute to a 100% clean energy economy in California.

Background:

Small hydropower, defined as 30 MWs or less, is an eligible resource under the California Renewable Portfolio Standard and has hundreds of MWs of potential growth in California. Small hydropower was included in the CEC's August 28 "Modeling Framework and Scenarios Overview", but was excluded in the subsequent August 31 version because of "Inadequate data on new capacity cost and resource availability for modeling purposes." Our comments below attempt to provide the necessary data for small hydropower's inclusion in future reports.

There are two types of small hydropower projects with a combined 600 MWs of development potential in California – in-conduit and non-powered dams. Both of these resources take advantage of existing water infrastructure, which means they require no additional land use. In addition, these resources are located in-state, which reduces California's reliance on imported energy. Since there are serious environmental concerns with both the acreage required for new renewable resource builds and long-distance transmission lines, NHA believes in-state small hydropower provides additional environmental benefits beyond carbon free generation. While small hydropower potential is not enough to achieve S.B. 100 goals on its own, it can provide a significant slice of the pie at relatively low cost.

1. In-conduit Hydropower Potential in California:


76 new in-conduit hydropower facilities were constructed in the U.S. from 2006 to 2019 and there is significantly more potential for growth, especially in California.¹ In 2019, the CEC's <u>California's In-conduit Hydropower Implementation Guidebook</u> found that California has 414 MWs of untapped in-conduit hydropower potential. The guidebook provides extensive details on capacity costs and resource availability.

In-conduit hydropower utilizes existing water infrastructure to generate electricity, such as irrigation systems, diversion structures, wastewater outfalls, groundwater recharge sites, and other locations along the water distribution network. Given the state's topography and existing water distribution networks, California is a leading state for in-conduit hydropower growth.

The CEC's guidebook estimates that costs are typically between \$5,000-\$15,000 kw with a payback period of 15 years. However, the report also notes that costs vary widely from project to project:

"The financial feasibility of the project depends on initial project capital investment, annual (O&M) costs, and project benefits calculated on average annual energy generation and the price of the generated electricity... costs can vary widely between projects and should not be generalized."

The breakdown of costs is as follows:

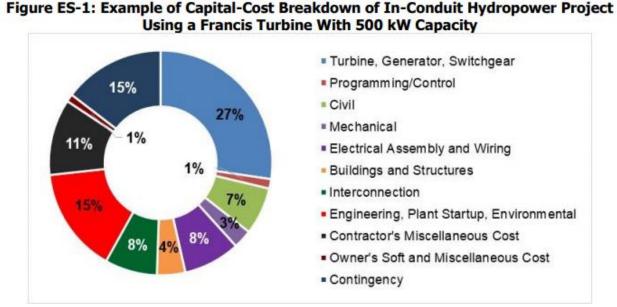

The breakdown of costs is as follows.

Source: Stantec, 2019

¹ DOE Hydropower Market Report 2017 and 2019. Available at https://www.energy.gov/sites/prod/files/2018/04/f51/Hydropower%20Market%20Report.pdf

In addition, the regulatory process for in-conduit development is more streamlined than other technologies, due to its limited to non-existent environmental impact, and projects can often receive an exemption from the FERC licensing process.

There are many examples of successful in-conduit projects in California and nearby states. For example, the Fontana Water Company Sandhill WTP project commissioned in 2013 had a total cost of \$1.6 million, annual revenue of \$100,000, annual generation of 1,936,000 kwh, a payback of 8 years, and a 30-year savings of \$4.2 million. Similar examples are included in the NLine presentation included in the appendix of these comments.

Other examples, though out of state, worth highlighting for comparison are the Juniper Ridge and Ponderosa projects in Bend, Oregon. These projects have capacities of 5 MWs and 0.75 MWs, respectively, and are the result of a coordination between renewable energy developers, irrigation districts, environmentalists and Oregon state government financing programs.² This kind of partnership could be formed in California.

2. Non-powered dams in California:

In the last ten years, several non-powered dams in the U.S. were retrofitted to include power generation capabilities. Non-powered dams are attractive resources for new renewable development because the majority of the civil works is already in place, which reduces both costs and environmental impacts. While most non-powered dams in California have power potential less than 30 MWs, any larger projects could still be eligible as a non-emitting resource under S.B. 100.

Some examples of recent non-powered dam developments include American Municipal Power's four new projects on the Ohio River with more than 300 MWs of combined capacity³ and Eagle Creek's projects in the Northeast. In addition, Missouri Energy Services' Red Rock facility in Iowa was put into service this summer with a total capacity of 36.4 MWs⁴. Dozens of other projects around the country have received licenses from FERC and are candidates for development.

The federal government has invested substantial resources into non-powered dam development. In 2018, Congress directed FERC to establish an expedited licensing process for adding power generation to non-powered dams, with the goal of completing the licensing process in less than two years.⁵ In

https://www.energy.gov/eere/water/downloads/hydropower-vision-report-full-report

² See DOE Hydrovision Report on page 149. Available at:

³AMP Hydroelectric Power: https://www.amppartners.org/generation/hydro

⁴ Red Rock Project Overview: https://www.redrockhydroproject.com/project-overview/

⁵ FERC News Release: "FERC Finalizes Expedited Hydro Licensing Process" (2019). Available at: https://www.ferc.gov/news-events/news/ferc-finalizes-expedited-hydro-licensing-process

addition, the DOE⁶, FERC⁷, the Army Corps of Engineers⁸, and the Bureau of Reclamation (BOR)⁹ have all conducted resource assessments of power potential at federal non-powered dams. Estimates for instate California non-powered dam energy potential are as high as 195 MWs.

The BOR study is especially relevant in this proceeding because the BOR uses Boca Dam, a non-powered dam in California, as a case study for cost and resource availability. BOR estimates that Boca Dam has a potential installed capacity of 1.1 MWs, an annual production of 4,370 MWh, a capacity factor of 0.43, and requires a 1.14 mile transmission interconnection. Tables 3-6 and 3-7 provides key cost metrics, but the full case study can be found on Chapter 3 of the BOR report: Hydropower Resource Assessment at Existing Reclamation Facilities (2011)

Table 3-7 Boca Dam Site Benefit Cost Ratio and IRR Summary

Present Worth of Costs ¹ (million)	\$6.5
Present Worth of Benefits ¹ (with Green Incentive) (million)	\$11.0
Present Worth of Benefits ¹ (w/o Green Incentive) (million)	\$5.9
Benefit Cost Ratio (with Green)	1.68
IRR (with Green)	11.3%
Benefit Cost Ratio (w/o Green)	0.89
IRR (w/o Green)	3.4%
Note:	

All costs in 2010 dollars

Table 3-6 Example Costs for Boca Dam Site

Cost Component	Cost (\$)
Total Direct Construction Cost	3,020,666
Civil Works	413,583
Turbine(s)	651,112
Generator(s)	382,846
Balance of Plant Mechanical	130,222
Balance of Plant Electrical	133,996
Transformer	48,109
Transmission-Line	262,200
Contingency (20%)	404,414
Sales Taxes	200,185
Engineering and CM (15%)	394,000
Total Development Costs	4,393,028
Licensing Cost	0
Total Direct Construction Cost	877,844
T-Line Right-of-Way	3,020,666
Fish & Wildlife Mitigation	41,455
Recreation Mitigation	0
Historical & Archeological	306,261
Water Quality Monitoring	146,802
Fish Passage	0
Annual O&M Expense	144,379
Fixed Annual O&M	29,509
Annual Variable O&M	29,760
FERC Charges	1,676
Transmission / Interconnection	10,000
Insurance	9,062
Taxes	36,248
Management / Office / Overhead	15,103
Major Repairs Fund	3,021
Reclamation / Federal Administration	10,000

^{1 -} Total and Present Value Costs Calculated over 50-year Period of Analysis at 4.375%

⁶ DOE "An Assessment of Energy Potential at Non-Powered Dams in the United States" (2012). Available at https://hydrosource.ornl.gov/sites/default/files/NHAAP NPD FY11 Final Report.pdf

⁷ FERC "Non-powered Federal Dams with Potential for Non-federal Hydropower Development" (2019). Available at: https://www.ferc.gov/news-events/news/ferc-issues-guidance-hydro-development

⁸ U.S. Army Corps of Engineers "Hydropower Resource Assessment at Non-powered USACE Sites" (2013). Available at: https://www.hydro.org/wp-content/uploads/2014/01/Army-Corps-NPD-Assessment.pdf

⁹ Bureau of Reclamation "Hydropower Resource Assessment at Existing Reclamation Facilities" (2011). Available at: https://www.usbr.gov/power/AssessmentReport/USBRHydroAssessmentFinalReportMarch2011.pdf

DOE "An Assessment of Energy Potential at Non-Powered Dams in the United States"

State	Name of	River	Potential Capacity
	Non-Powered Dam		MWs
CA	Palo Verde Diversion	Colorado River	54.3
CA	Fish Barrier Dam (Oroville Facilities)	Feather River	35.2
CA	Morelos Diversion	Colorado	25.2

FERC "Nonpowered Federal Dams with Potential for Non-federal Hydropower Development"

State	Name of Non-powered Dam	River	Potential Capacity MWs
CA	Morelos Diversion	Colorado River	25.2
CA	North Fork Dam	North Fork American River	6.2
CA	Hidden Dam	Fresno River	2.6
CA	Boca Dam	Little Truckee River	1.2
CA	Imperial Dam	Colorado River	1.1
CA	Casitas Dam	Coyote Creek	1.0

Additional information can be found in the appendix of these comments, which includes presentations from AMP, Eagle Creek, and French Development on how they finance and develop non-powered dams.

Conclusion:

There is substantial opportunity for small hydropower growth in California, through both in-conduits and non-powered dams. Both of these resources rely on existing infrastructure and are located in-state. Inclusion of small hydropower in future CEC, CPUC, and CARB reports and models can help California achieve the goals of S.B. 100 as quickly and cost effectively as possible.

To the extent CEC, CPUC, and CARB need additional information beyond the CEC report on in-conduits and the DOE, FERC, Army Corp, and BOR reports on non-powered dams, NHA members are ready and willing to assist.

Thank you again for consideration of these comments.

Sincerely,

Dennis Cakert
Manager of Regulatory Affairs and Market Policy
National Hydropower Association
601 New Jersey Ave NW
Washington, D.C. 20001

Email: Dennis@hydro.org

(202) 697-2404

Appendix:

- 1. NLine Energy Small Hydro Overview
- 2. American Municipal Power Case Study: Tax Advantaged Financing for Hydroelectric Facilities
- 3. Eagle Creek Renewable Energy: Financing a Small Hydro Portfolio
- 4. French Development Enterprises

Small Hydroelectric renewable power generation



Small Hydropower Overview

January 2020




NLine Energy: What We Do

Mission

- Harness wasted energy in existing infrastructure
- Create cost-effective renewable electricity
- Provide immediate financial benefit to customers

Overview

- 91% of Small Conduit Hydro Development in CA*
- 31% of Small Conduit Hydro Development in US*
- Association of California Water Agencies (ACWA)
 Approved Preferred Provider**
- Offices in CA, OR, and NH

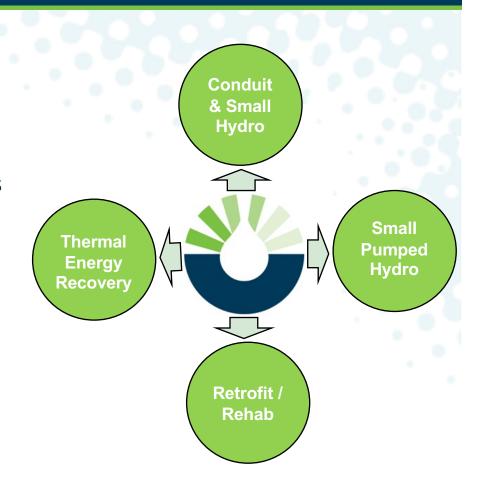


^{*2013-}pres. Approved FERC NOI Conduit Exemption filings by MW

^{**}Competitive RFQ process (2010-2018)



Value of Small Hydro



Technology

- 50-100 year asset life
- New models @ 1/3 cost of old hydro



Financing/ Economics

- Economic payback and financial returns
- Net-energy metering and feed-in-tariffs



Regulations

- FERC Notice of Intent (Exemption)
- Qualified renewable energy for RPS, AB 32



Environmental

- Pre-Disturbed Earth Categorical Exemption
- Negligible footprint v. other renewables




Operations & Maintenance

- "Pump in reverse"
- Minimal training required



Our Solution: Water to Energy Recovery

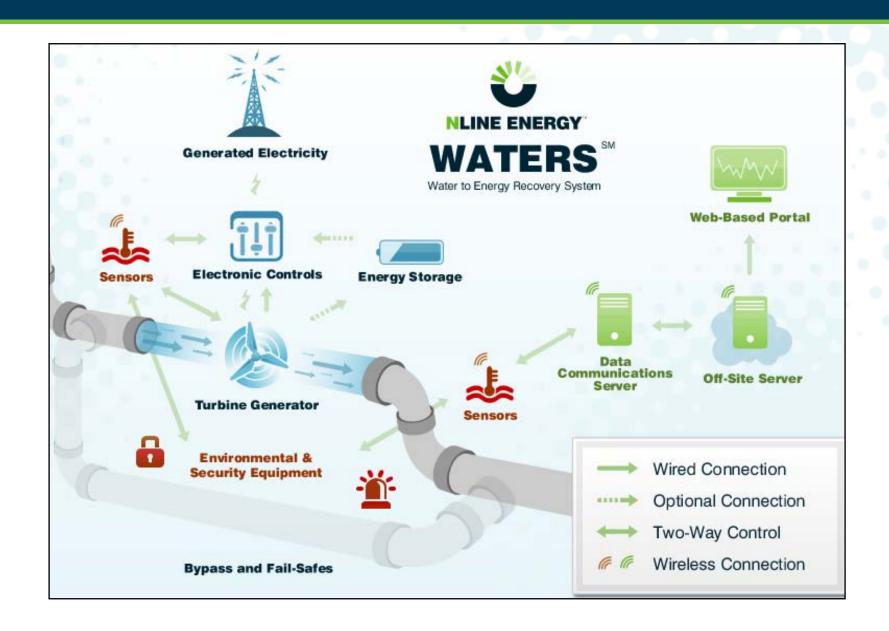



Our Solution: Water to Energy Recovery





Experience Across the Small Hydro Spectrum

NLine Energy Experience			
Water System	✓Raw	✓ Potable	✓ Recharge
Hydro Sites	✓ Pipes	√ Canals	√ Dams
Civil Construction	✓ New build	✓ Additions	✓ Retrofit
Technologies	✓ Impulse	✓ Reaction	✓Hydrokinetic
Pressure Range	✓ High head	✓ Low head	√Variable
Districts	√Water	✓ Irrigation	✓ Flood Control
Financing	√Owner	✓ Third-party	✓ PPA/Lease




Hydro Technologies

NLine Energy uses sitespecific technology, with proprietary software for selection and modeling

Deep expertise in classic hydro technologies

High Pelton Head Impulse Turgo Cross Flow Hydropower Francis **Turbines** Kaplan Reaction Screw Waterwhee Low lydrokinetic Head

Ear-to-the-ground for emerging hydro tech

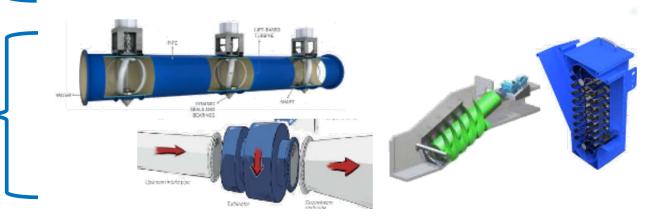



Small Hydro Sites

High Head, Low Flow

- Pressure reducing valves/vaults.
- Energy dissipation devices

Low Head, High Flow

- · Canals, WWTP effluent outfall,
- Large diameter transmission lines


Existing Hydro Plants

- · Conditions assessments
- Capacity amendments for enviro flows

Small Pumped Storage

- Utility-scale energy storage
- Off-peak or renewable energy storage



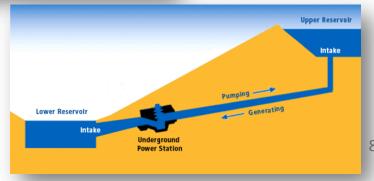



Site Selection: High Head, Low Flow

- Eligible Sites:
 - Pressure reducing valves/vaults
 - Energy dissipation devices
 - Sleeve valves
 - Turnouts
- Minimum average flow >4.5 cfs (~3 mgd)
- Minimum head differential >100 feet (43 psid)
- Short distance to 3-Phase Power







Site Selection: Low-Head, High-Flow Sites


- Eligible Sites:
 - WWTP effluent outfalls,
 - Canal drops,
 - Large diameter transmission lines
- Minimum average flow >30 cfs (~20 MGD)
- Minimum head >10 feet (4.3 PSI), but
 <100 feet (43 PSI)
- Short distance to 3-Phase Power





Development Steps









Feasibility Assessment Preliminary Analysis

Design

Construct & Commission

Maintain

- No-Cost
- 10-point fatal flaw analysis of financial, technical, regulatory hurdles
- Go / No-Go recommendation
- Investmentgrade analysis
- Financial,
 technical,
 regulatory
 features of site
 40+ page report
- Competitive technology bid
- Electrical, environmental, interconnection, geo-tech/survey, surge analysis
- Construction and project management
- Commissioning and gridsynching
- Marketing, messaging

- Operator training
- Operations and maintenance support
- Compliance and performance analysis



Our Clients

- Amador Water Agency
- East Valley Water District
- San Gabriel Valley Water Company
- El Dorado Irrigation District
- Imperial Irrigation District
- Kaweah River Power Authority
- Mojave Water Agency
- Nevada Irrigation District
- Placer County Water Agency
- San Bernardino Valley MWD
- San Diego County Water Agency
- Sonoma County Water Agency
- Sweetwater Authority
- Three Valleys Municipal Water District
- City of Tacoma
- Metro Parks in Tacoma
- West Valley Water District
- City of Hood River
- East Fork Irrigation District
- Lost & Boulder Ditch Improvement Company





























Fontana Water Company: Sandhill WTP Project

Site Name	Sandhill WTP
Head	277-347 ft
Flow	4-13 cfs
Technology	Pump-as-Turbine
Turbine(s) rating	310 kW
Annual generation	1,936,000 kWh
Annual revenue	\$100,000
Project cost	\$1,675,000
Subsidies	\$848,000
Payback	8 years
30-yr net savings	\$4,200,000
Status	Commissioned (2013)





Three Valleys MWD: Miramar Hydro Project

Site Name	Miramar WTP
Head	50 - 250 ft
Flow	3-20 cfs
Technology	Pump-as-Turbine coupled with 525 kW Francis
Turbine(s) rating	435 kW
Annual generation	621,000 kWh
Annual revenue	\$67,000
Project cost	\$1,575,000
Subsidies	\$125,000
Payback	14.6 years
Status	Commissioned (2015)





Amador Water Agency: Tanner WTP Project

Site Name	Tanner WTP
Head	170-230 ft
Flow	2-10 cfs
Technology	Pump-as-Turbine
Turbine(s) rating	118 kW
Annual generation	580,000 kWh
Annual revenue	\$79,000
Project cost	\$1,595,000
Subsidies	\$140,000
Payback	17.7 years
30 yr net savings	\$2,620,000
Status	Commissioned (2016)





Sweetwater Authority: Perdue WTP Project

Site Name	Perdue WTP
Head	300-312 ft
Flow	7-29 cfs
Technology	Pump-as-Turbine
Turbine(s) rating	590 kW
Annual generation	3,716,000 kWh
Annual revenue	\$362,000
Project cost	\$2,850,000
Subsidies	\$552,000
Payback	14.1 years
30 yr net savings	\$6,000,000
Status	Commissioned (2017)





East Valley Water District: Plant 134 Project


Site Name	Plant 134 WTP
Head	255 ft
Flow	3-11 cfs
Technology	Pump-as-Turbine
Turbine(s) rating	180 kW
Annual generation	807,000 kWh
Annual revenue	\$76,000
Project cost	\$1,560,000
Subsidies	\$150,000
Payback	14 years
30-year net savings	\$3,105,000
Status	Commissioned (2018)





West Valley Water District: Roemer Project

Site Name	Roemer WTP
Head	235 – 295 ft
Flow	4 – 25 cfs
Technology	Pump-as-Turbine
Turbine(s) rating	440 kW
Annual generation	2,020,000 kWh
Annual revenue	\$202,000
Project cost	\$2,227,000
Subsidies	\$270,000
Payback	10 years
30-yr net savings	\$8,700,000
Status	Commissioned (2018)

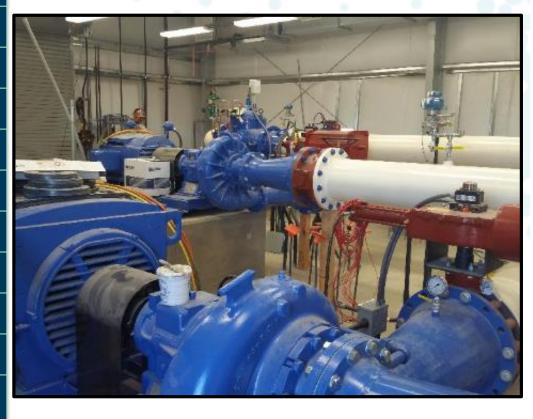



El Dorado Irrigation District: Reservoir 7 Project

Site Name	Res 7
Head	178 – 208 ft
Flow	3 – 25 cfs
Technology	Pump-as-Turbine
Turbine(s) rating	485 kW
Annual generation	1,853,000 kWh
Annual revenue	\$180,000
Project cost	\$2,600,000
Subsidies	\$0
Payback	15.5-17 years
30 yr net savings	\$4,217,000
Status	Commissioned (2018)





Mojave Water Agency: Deep Creek Recharge Project

Site Name	Deep Creek
Net Head	460-500ft
Flow	29 cfs
Technology	Pelton
Turbine rating	840 kW
Annual generation	3,700,000 kWh
Annual Revenue	\$330,000
Project cost	\$4,900,000
Payback	10-15 years
Status	Commissioned (2019)





San Gabriel Valley Water Company: B24 Project

Site Name	B24
Head	110-170 ft
Flow	5-8 cfs
Technology	Pump-as-Turbine
Turbine(s) rating	72 kW
Annual generation	430,000 kWh
Annual revenue	\$56,000
Project cost	\$1,300,000
Subsidies	\$760,000
Payback	8.9 years
30-yr net savings	\$2,325,000
Status	Commissioned (2019)





Amador Water Agency: Ione Reservoir Project

Site Name	Ione Reservoir
Net Head	460-500ft
Flow	1-6 cfs
Technology	Pelton
Turbine rating	450 kW
Annual generation	1,383,000 kWh
Annual Revenue	\$216,000
Project cost	\$2,970,000
Subsidies	\$750,000
Payback	11.6 years
Status	Commissioning (Q1 2020)





San Bernardino Valley MWD: Waterman Recharge Project

Site Name	Waterman
Head	435 ft
Flow	28 cfs
Technology	Pelton
Turbine(s) rating	1,050 kW
Annual generation	3,575,000 kWh
Annual revenue	\$326,000
Project cost	\$3,701,000
Subsidies	\$0
Payback	12.3 years
30-yr net savings	\$4,992,000
Status	Construction Bidding (Commissioning Q3 2020)





Summary



- ✓ Recover wasted energy
- ✓ Use existing infrastructure
- ✓ High capacity factor & efficiencies
- ✓ Long asset life
- ✓ Favorable payback and cash flow



- ✓ Owner's Representative: integrator, developer, financier
- ✓ Niche small hydro focus
- Experience across site types
- ✓ Site-specific technologies



NLine Energy, Inc.

5170 Golden Foothill Parkway

El Dorado Hills, CA 95762

o: 916.235.6852 | f: 866.444.4320

www.nlineenergy.com





Tax-Advantaged Financing for Hydroelectric Facilities

American Municipal Power, Inc.
Case Study
June 3, 2013

Edward P. Meyers

Managing Director

BMO Capital Markets





Project Profile



- American Municipal Power, Inc. completed Financing for three "run-of-the-river" hydroelectric facilities on the Ohio River
 - Cannelton 88 MW
 - Smithland 76 MW
 - Willow Island 44 MW
- Current Estimated commercial operation dates for the three facilities
 - Cannelton Third Quarter 2014
 - Smithland Second Quarter 2015
 - Willow Island Fourth Quarter 2014
- FERC licenses are owned by AMP and all permits are in hand for all three facilities





Contractual Obligations and Investor Protections

Power Sales Contract with 79 Project Participants

- Take-or-pay "come hell or high water" commitments
- 25% "step-up" provision
- Contracts extend beyond the final maturity of the bonds
- Top six participants account for 47% of allocated capacity and all have credit ratings in at least the "A" category
- Participants provide geographic diversity
- Most Participants set their own electric rates and exercise local control

Authority to enter take-or-pay Power Sales Contract

- Home Rule Powers of Ohio Participants; successfully validated in the Franklin County Court of Common Pleas
- Statutory authority of non-Ohio Participants





Contractual Obligations and Investor Protections con't

Unqualified Legal Opinions as to validity and enforceability

 Opinions were unqualified as to the validity of Power Sales Contract and take-or-pay provisions

Master and Supplemental Trust Indentures

- 1.10X rate covenant
- 1.10X additional bonds test 2 years after Commercial Operation
- A fully funded Debt Service Reserve Fund
- These tests are net of the BABs interest subsidy





Overview of Combined Hydroelectric Phase 1 Financing

First permanent financing in November 2009 - \$666,435,000

- All-In TIC 4.221%
- Comprised of four series of debt:
 - \$24,425,000 Series A (Federally Taxable) All-In TIC 4.401%
 - \$497,005,000 Series B (Federally Taxable Build America Bonds) All-In TIC 4.218%
 - \$122,405,000 Series C (Federally Tax-exempt) All-In TIC 4.228%
 - \$22,600,000 Series D (Tax-Credit CREBs) Private Placement

Final permanent financing in December 2010 - \$1,378,990,000

- All-In TIC 5.332%
- Comprised of three series of debt:
 - \$152,995,000 Series A (Federally Taxable) All-In TIC 7.498%
 - \$1,109,995,000 Series B (Federally Taxable Build America Bonds) All-In TIC 5.265%
 - \$116,000,000 Series C (Tax Credit CREBs) All-In TIC 3.191%

Total Financing \$2,045,425,000

- All In TIC 4.978%
- Final Maturity Date February 2050
- Expected to receive \$1,308,129,639.16 in BABs subsidy over the term of the bonds
 - Sequestration reduced August 2013 subsidy payment by \$1,832,540
- Expected to receive \$69,118,252 in CREBs subsidy over the term of the bonds
 - Sequestration reduced August 2013 subsidy payment by \$204,867





Rating Agency Strategy



- In order to obtain financing at reasonable interest rates, presentations were made to rating agencies and bond investors demonstrating that:
 - The project was sound
 - AMP had a viable plan of finance and bond security provisions in place
 - The project would be well-managed after COD





The Project is Sound



- Sawvel and Associates retained to perform feasibility study
- MWH Americas, Inc. (MWH) retained as Project Engineer
 - AMP chose three of the top five hydroelectric development sites on the Ohio River, as identified by MWH.
 - FERC licenses already in hand for all three sites
 - Each project is being constructed using bulb type turbine-generating
 - The physical life of each project is expected to exceed the life of all debt issued
- AMP employed experienced consultants and vendors





A Viable Plan of Finance




- AMP has substantial liquidity through a revolving \$750 million line of credit expandable to \$1 billion with a syndicate of banks
- AMP employed a multi-pronged financing structure, utilizing several taxadvantaged financing instruments
 - Taxable bonds
 - Tax-exempt bonds
 - Build America Bonds
 - Clean Renewable Energy Bonds





The Project will be Well-Managed after Commercial Operation Date

- AMP has relevant hydroelectric generation experience from constructing and operating a similar hydroelectric plant located on the Ohio River that has been in operation since 1999
- AMP monitors Participant credit quality on an ongoing basis
 - Financial strength must be demonstrated prior to becoming an AMP member
 - Members undergo annual review and credit scoring upon release of their annual audit
 - Credit scores were shared with Rating Agencies for initial rating as well as on an ongoing for rate reviews

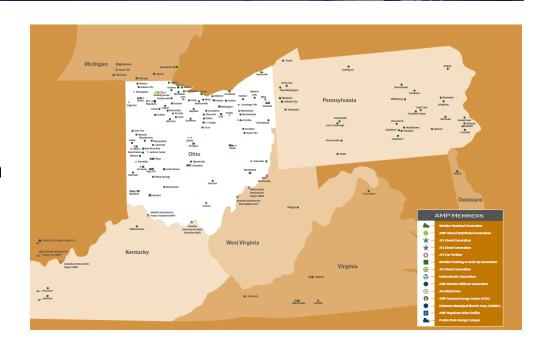





Case Study: American Municipal Power, Inc.

In adverse market conditions, AMP was successful in pricing its entire \$2.045 billion bond issue at levels producing an all-in total interest cost of 4.978%

- Underlying credit ratings of A3/A/A (Moody's/S&P/Fitch)
 - Moody's rating of A3 due to multiple projects under construction
 - Moody's affirmed A3 rating May 20, 2013
- Transaction marketing plan included internet roadshows as well as numerous one-on-one investor conference calls
- Bonds were distributed to both institutional and retail investors,
 - Including 30 who had never owned AMP bonds previously and one international investor
 - For Series 2010 BMO carved out retail maturities in 2029 and 2030 which, when combined with other retail priority orders, enabled AMP to achieve a \$56 million retail participation level
- Series 2010 bonds strategically utilized bond insurance to save 8bps, net of the upfront premium, on \$27.3 million bonds
- Solid investor demand resulted in 1.5x oversubscription and allowed us to tighten credit spreads 15bps on \$324 million bonds (accounting for 24% of aggregate par) from initial to final pricing







Financing a Small Hydro Portfolio



NHA Finance Summit
October 2, 2014

Matthew Ocwieja Director of Finance, Eagle Creek Renewable Energy, LLC

About Eagle Creek Renewable Energy

Eagle Creek Renewable Energy owns, operates, and develops hydroelectric power projects

- 41 operating facilities in 7 states
 - Over 90 MW capacity
 - Nearly 360 million kWh; powers nearly 40,000 homes
- 2 additional facilities under construction in VT
 - 3 MW; over 10 million kWh



- Hudson Clean Energy Partners founding investor
- Additional investment in 2013 led by Power Energy Corporation, a subsidiary of Power Corporation of Canada

A Portfolio Approach to Financing

Financing a small hydro facility requires overcoming a number of challenges:

Transaction size

• Small financing transactions attract less interest from banks and/or require more expensive non-project debt.

Transaction cost

• A small financing carries nearly the same internal and external cost as a larger one and therefore provides less benefit from financing.

Market Risk

- A single small hydro asset is generally either fully contracted or fully merchant.
- Merchant assets support only small amounts of high-cost debt.


Hydrology Risk

 A single hydro asset, while much more consistent on an intra-day or inter-day timescale than other renewable generation, can have significant year-to-year production variability.

A portfolio approach can overcome these challenges

Focus on Risk-Adjusted Return to Equity

The goal for Eagle Creek management is to maximize the risk-adjusted return to equity holders

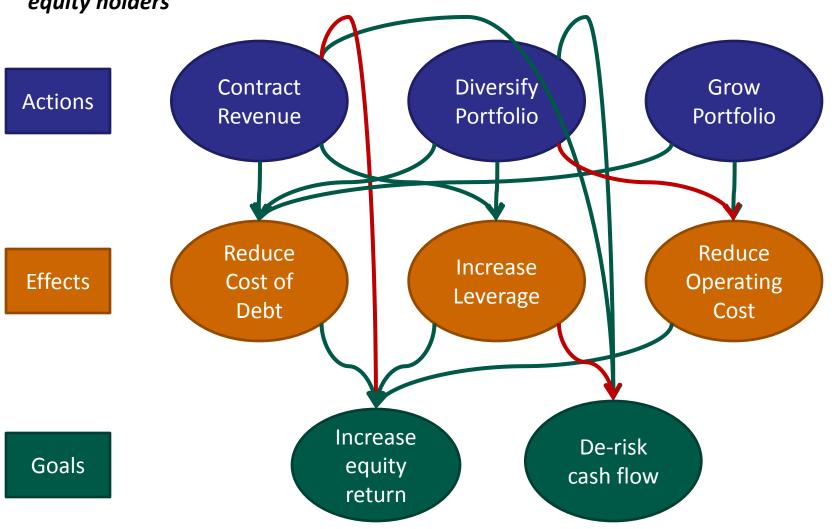

Revenue Contracting

Contracting revenue reduces portfolio risk and allows for improved financing but at a cost



Benefits

- Reduced risk to equity investors
- Contract above downside projection allows for greater debt capacity
- Reduced volatility allows for lower cost of debt

Drawbacks

- New contracts likely to be at belowforecast rates
 - Supply-demand imbalance in long-term market favors buyers; in some markets no buyers longer than 3 years
 - Small projects have little market power and often don't receive fair contract rates
 - Run-of-river hydro contracts are unit contingent; off taker may apply a significant discount
- Acquisition of already-contracted assets is competitive and lower-risk/lower-return for equity investors


A balance of contracted and uncontracted assets allows greatest flexibility and opportunity

- In a highly-contracted portfolio, revenue contracts may not be limiting factor on debt sizing
- More leverage results in higher cost of debt (lower marginal benefit) and risk to equity
- Balanced approach allows for acquisition of facilities where fair contracts are unlikely


Diversification of Hydrology Risk

Beyond power pricing, the other major risk in hydro is water availability

- Among hydro plants Eagle Creek has studied, coefficient of variation (standard deviation divided by average) of annual production varies from 9% to 40%
- Representative plant shown below has coefficient of variation = 22% over 14 years

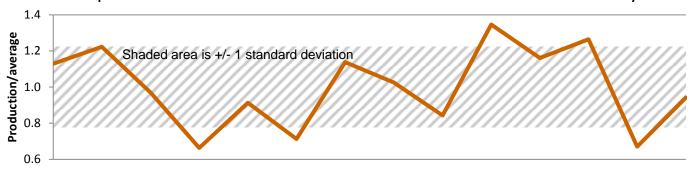

- A representative portfolio has significantly lower coefficient of variation = 13%
 - Includes plant above; approx. 17x the annual average production of the single plant

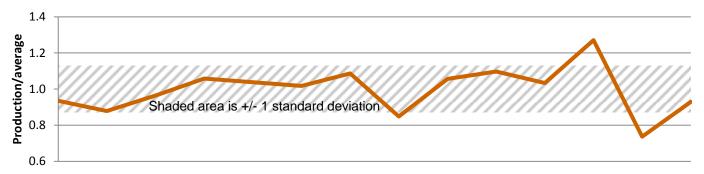

Diversification of hydrology reduces risk to equity holders, firms up financing case permitting greater leverage, and reduces credit support requirements resulting in lower cost of debt.

Other Benefits of a Portfolio

A larger portfolio of facilities further improves returns and reduces risk through:

Reduced operating expense

 Synergies among plants can result in a lower overall cost/MWh.

Larger financing transaction size

 Attracts interest from more financing sources; competition results in lower cost.

Smaller relative expenses

• Fixed costs related to financing (legal, technical, market study) do not scale with portfolio size.

Eagle Creek's approach is to create value through an optimized portfolio of small hydroelectric power plants.



Capital/Project Cost Examples for Small Hydro

Mid-West 1	4.5 MW	\$5.6M/MW
Mid-West 2	1.0 MW	\$6.5M/MW
Lakes Region	23 MW	\$4.3M/MW
South Central	14 MW	\$2.7M/MW
NE Canada	19 MW	\$2.6M/MW

Note...these project costs vary with - type of project, coffer dam construction, site work, rock removal and blasting, water depth and flow, labor rates, etc.

Fixed and Variable Operating Costs

Industry average of O&M = 1% to 3% of total project cost...assume 2%

Future Cost Changes...see modular French Dam

Industry move to modular vs. conventional hydro construction

Growth of modular pumped storage hydro

Further reduction in component pricing...including batteries

Interconnection Costs (unknown, see location, state, utility for needs)



Resource Availability

Per the ASCE, CA currently has 1,580 permitted dams with an average age of 70 years. Only 24% are powered and 74% are rated as High Hazard...and CA is in dire need of improved water controls.

Retrofits (adding new power) or rehabs (adding more power) from the existing dam inventory is a quick way to jump start renewable resources.

Creating additional pumped storage facilities and site-select hydro Micro Grids with "blackstart capabilities" is essential to resource development and utilization.

Energy storage/output and minimum flow is project or location specific.

For further information, see www.fdepower.com or call Bill French directly at 617-293-0193.